


# AMERICAN FABRIC FILTER CO.

## PORTABLE RECLAIM SIFTER W/ ROLLING BASE

The latest generation of AFF Portable Sifters incorporates many innovations to make this your easiest and most efficient tool to sift small batches of dry powders. It can be operated by itself sitting on top of a heavy duty plastic container or 55 gal. drum, or using the convenient new adjustable rolling base. A variable force motor, counterweights, and oversized rubber vibration dampeners mean quiet operation. A custom RCN output dust chute allows easy changes between collection containers. One framed screen is included. Options include additional framed screens, overspout, and motor speed controller.




Waterproof 110V  
Vibrating Motor

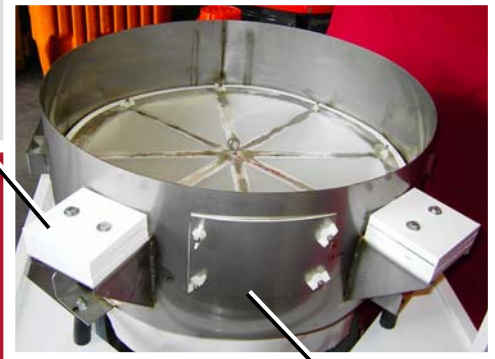

Counterweights

Overs Door

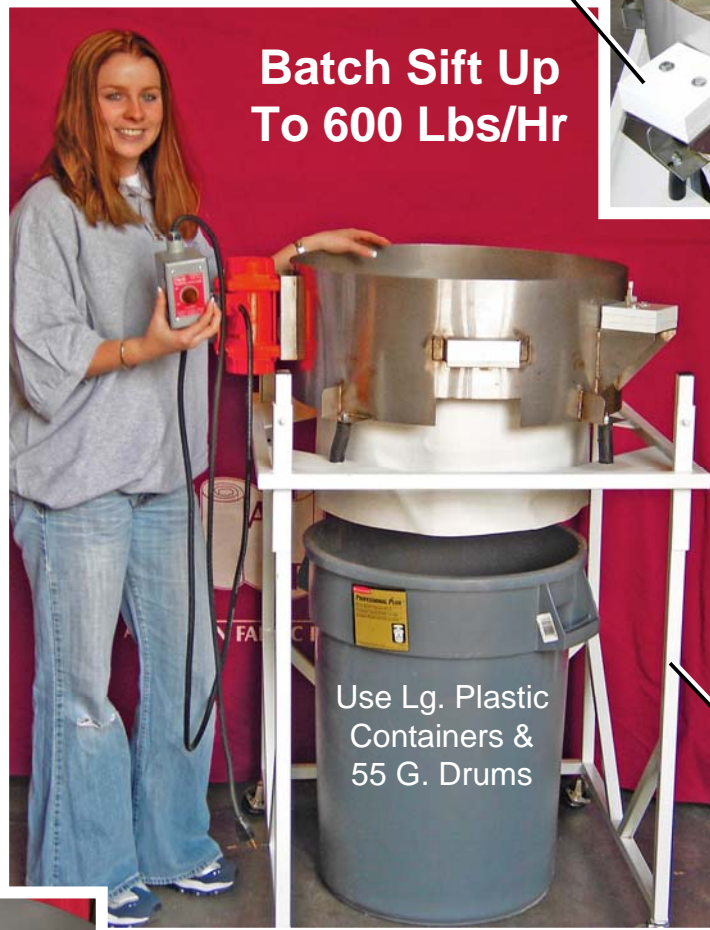

**Batch Sift Up  
To 600 Lbs/Hr**

Use Lg. Plastic  
Containers &  
55 G. Drums

Optional Overs Spout



Adjustable Height  
Rolling Base




Remote Power Switch  
(Variable Speed  
Controller Optional)



Custom RCN  
Dust Chute




Interchangeable  
Screen Frames  
(Custom Meshes &  
Fabrics Available)



Made in USA

# A.F.F. PORTABLE RECLAIM SIFTER

## 2007 PRICE LIST

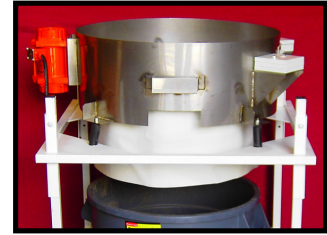

<u>Description</u>	<u>Price</u>	<u>Weight</u>
<b><u>MOTORIZED SIFTER WITH STAND</u></b>		
<p><b><u>GENERAL</u></b> - 24 1/4" dia. x 12" high 16 guage stainless steel construction with inside support flange. Screen open dia. 20"; 4" x 6" channel mount for vibrating motor plus (2) adjustable opposing counter balances. Interior support flange has (8) 1/4-20 permanent bolts to secure separate interchangeable self-supported screen ring. Matching holes are provided in screen ring to secure parts together with nylon wing nuts. A 5" wide x 4" high overs port is located at screen height opposite the motor. Blank cover plate included. All edges rounded and de-burred. Price includes 2P-100W MOTOR, (1) SCREEN AND ROLLING BASE.</p>	Call For Price	110 lbs.
<b><u>VIBRATOR MOTOR</u></b>		
<p><b><u>2P-100 HEAVY DUTY ELECTRIC VIBRATOR</u></b> - 115 VAC 0.5 amp totally enclosed, maintenance free motor rated for continuous operation with water-resistant seals and coating for safe system washdown. User-adjustable eccentrics 75-150 lb. force @ 3600 RPM (Optional speed control available. Call for price.)</p>	Included	Included
<b><u>SIFTER SCREEN</u></b>		
<p><b><u>SCREEN</u></b> - One Stainless Steel Tensile Bolting Cloth (TBC) screen is provided with sifter system in a stock mesh size. Each screen is permanently attached to 1 3/4" wide stainless steel support ring. All screens are pre-drilled to match assembly bolt holes.</p>	Included	
<p><b><u>OPTIONAL SCREENS</u></b> - Same description as above. A wide choice of fabrics are available. Special Order mesh sizes and/or wires - e.g. Market Grade (MG) fabrics, Magnetic SS (MS), Nylon (NT), etc. are available at extra cost.</p>	Call For Price	2 lbs.
<p><b><u>OPTIONAL SCREENS</u></b> - If ordered at same time as sifter</p>	Call For Price	
<b><u>OPTIONAL OVERS SPOUT W/ SLIDING DOOR</u></b>		
<p><b><u>OPTIONAL SPOUT ORDERED WITH SIFTER-</u></b> Removable, reversible (to tilt up or down) 16 Ga. SS spout for discharge of overs. Standard size is 5" Wide x 4" High x 6" Long, with 1/2" vertical offset. Sliding Shut-Off Gate included. (Call for prices on custom sizes.)</p>	Call For Price	6 lbs.
<p><b><u>OPTIONAL SPOUT ORDERED SEPARATELY</u></b> - (Call for prices on custom sizes.)</p>	Call For Price	6 lbs.
<b><u>ROLLING BASE</u></b>		
<p><b><u>ROLLING BASE ORDERED WITH SIFTER-</u></b> Welded heavy duty 1" sq. steel tubing frame designed to support sifter over a steel, fiber or plastic container. Features include vibration dampening, height adjustments, and locking wheels. Painted. (Call for prices on custom sizes.)</p>	Included	
<p><b><u>ROLLING BASE ORDERED SEPARATELY</u></b> -</p>	Call For Price	55 lbs.

AFF Products are custom made and improvements occur continuously. Non-Stock items require about 8 weeks for delivery.